

# SIG.LAV V05

Multi-functional Single Lavalier Microphone  
(Universal for Camera&Phone)





## Foreword

Thanks for purchasing Comica SIG.LAV V05

## Notice

- ⚠ The product is compatible with iOS and Android systems. When using with Lightning interface devices, it is recommended to use original 3.5mm-Lightning adapter cable
- ⚠ While the product is used for iOS system phones, it supports both iPhone original audio recording mode and video recording mode
- ⚠ While the product is used for Android System phones, it only supports phone's original audio recording mode but not video mode, you should download 3rd party APP(Filmic Pro, Proshot, ect.) to use while in video shooting mode
- ⚠ Please stay away from heat source or interference source when using
- ⚠ Please avoid falling, collision or impact when using
- ⚠ Please do not use in rain or humidity, or there will be a risk of short circuit

## Main Features

- . Universal for Camera&Phone
- . Stepless Gain Control
- . Support Real-time/Playback Monitor
- . Super-shield and Low Noise Mic
- . LED Working Indicator

## Packing List



Body of Microphone



Back Clip



Carry Case



User Manual




Warranty Card

## Components and Instruction


### Microphone


- ① 3.5mm TRRS Audio Cable
- ② Monitoring Jack:  
Support playback monitoring on smartphone and real-time monitoring on camera
- ③ Work Indicator Light:  
When working normally, the indicator light is green; When the battery is low, the indicator light turns red
- ④ Mic
- ⑤ Gain Control Wheel:  
Adjust the output sensitivity of the microphone
- ⑥ Power/Smartphone/Camera Function Switch
- ⑦ Back Clip
- ⑧ Battery Holder

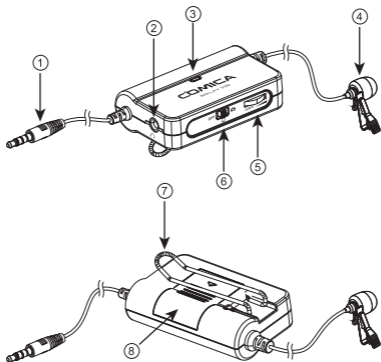


## Installation and Usage

### 1. Used with camera


- 1.1 When used with camera, move the switch to  , the indicator light turns green

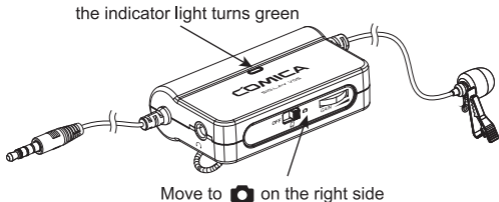


- 1.2 Insert the 3.5mm output connector into the 3.5mm input interface of the camera for recording

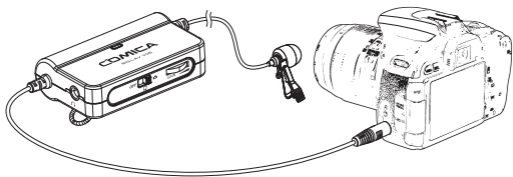



## 2. Used with smartphone

2.1 When used with smartphone, move the switch to  , the indicator light turns green

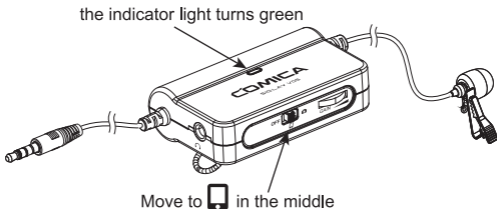


2.2 Connect the product and the smartphone through the 3.5mm output connector and related audio adapter cable; Open the recording software of the smartphone to record




 Please purchase related audio adapter cable by yourself

# Specifications

## Polar Pattern



## Frequency Response

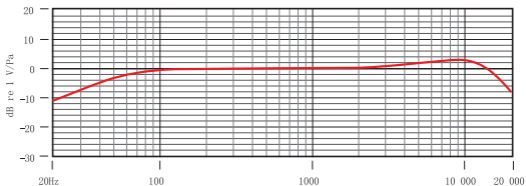



## Product Features

Polar Pattern	Omni-directional
Sensitivity	-35dB $\pm$ 2dB
Gain Range	Maximum increase +10dB
Frequency Response	80Hz~20kHz
S/N	70dB
Equivalent Noise	24dBA
Max SPL	100dB
Power Consumption	Average 20mW
Battery	CR2032 3V
Working Temperature	0°C ~ +50°C
Storage Temperature	-20°C ~ +60°C



Website: [comica-audio.com](http://comica-audio.com)

Facebook: Comica Audio Tech Global

Instagram: Comica Audio

YouTube: Comica Audio

COMICA is a registered trademark owned by Commlite Tech Co.,Ltd  
Email: [support@comica-audio.com](mailto:support@comica-audio.com)

## SIG.LAV V05

多功能单领夹式麦克风（相机手机通用）





# 前 言

感谢您购买科唛SIG.LAV V05

## 注意事项

- ⚠ 本产品兼容iOS和Android系统，搭配iPhone手机使用时，需使用原厂转接线
- ⚠ 该麦克风搭配iPhone手机使用时，在录音及视频模式下均可正常工作
- ⚠ 该麦克风搭配安卓手机使用时，在录音模式下可正常工作；在视频模式下，需下载第三方软件配合使用（如：抖音、快手等）
- ⚠ 使用时请远离热源或干扰源
- ⚠ 使用时请避免掉落，碰撞或重击
- ⚠ 请勿在下雨或潮湿环境中使用，否则会有短路的危险

## 产品主要功能

- . 相机手机通用
- . 无级增益可调
- . 支持实时/回放监听
- . 超强屏蔽、抗噪咪头
- . LED工作指示灯

## 包装清单



麦克风主体



背夹



便携袋



说明书




保修卡

## 部件介绍及说明

### 麦克风

- ① 3.5mm TRRS音频连接线
- ② 监听孔：  
支持手机回放监听和相机实时监听
- ③ 工作指示灯：  
正常工作时，指示灯亮绿灯；电池低电时，指示灯亮红灯
- ④ 咪头
- ⑤ 增益调节拨盘：  
调节麦克风输出灵敏度
- ⑥ 电源/手机/相机转换开关
- ⑦ 背夹
- ⑧ 电池仓

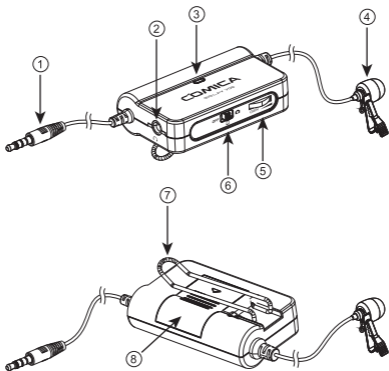


## 安装与使用

### 1. 搭配相机使用

1.1 用于相机时，将开关拨至 ，指示灯亮绿灯




1.2 把3.5mm输出接头插入相机的3.5mm输入接口，即可进行录音

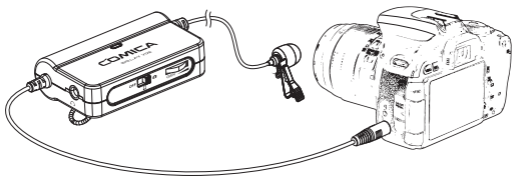




## 2. 搭配手机使用

- 2.1 用于手机时，将开关拨至 ，指示灯亮绿灯  
指示灯亮绿灯




- 2.2 通过3.5mm输出接头或以及相关音频转接线连接产品和手机；  
打开手机的录音软件，即可进行录音

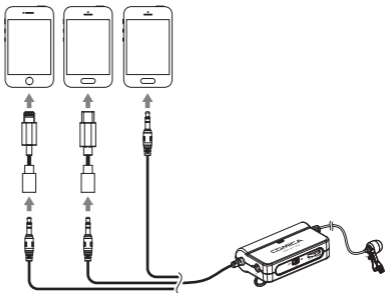


请自行购买相关音频转接线

## 指向图



## 频响图

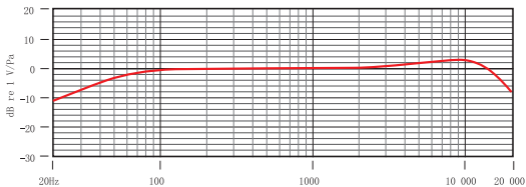

## 规格

指向性	全指向
咪头灵敏度	-35dB $\pm$ 2dB
增益调节	最大增加+10dB
频响	80Hz ~ 20kHz
信噪比	70dB
等效噪声	24dBA
最大声压级	100dB
功耗	平均20mW
电池	CR2032 3V
工作温度	0℃ ~ +50℃
储存温度	-20℃ ~ +60℃



扫二维码关注  
科唛官方公众号



COMICA科唛



COMICA科唛



COMICA科唛



COMICA科唛

邮箱: [support@comica-audio.com](mailto:support@comica-audio.com)

电话: 400-8303-981

网址: [comica-audio.com](http://comica-audio.com)

版权及科唛商标归味莱科技有限公司所有